
H₂O Series Fire Pumps and Systems

Wide range, really robust and definitely reliable





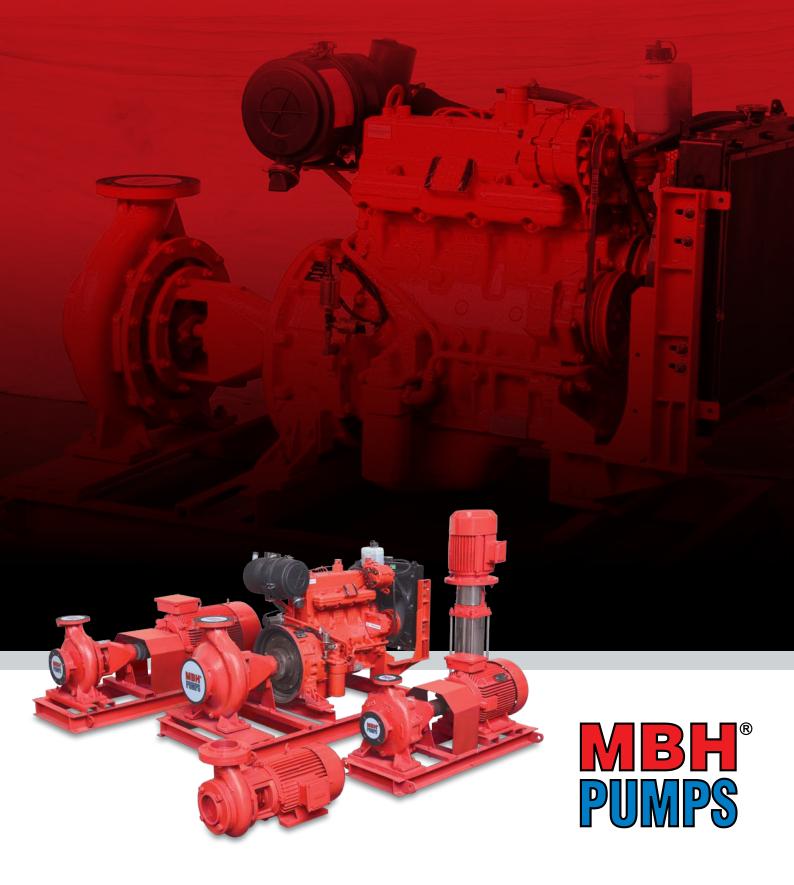

Main Electric Fire pump & Accessories

Flow rate upto 600 m³/hr Maximum head 140 m



are designed to provide water to stand pipe, sprinkler and hydrant systems for fire suppression in industrial and commercial facilities.

- Top centerline discharge with foot supported casing.
- Ease of installation.
- Simplifies piping layout. •
- Self-venting design eliminates the need for automatic air release valve.
- Rear pullout design supplied as standard with spacer coupling.
- Ease of maintenance, eliminates disturbing driver or piping when removing rotating element.
- Hydraulically balanced impeller extends bearing life and assures smoother operation.
- Cast iron construction with bronze impeller
- Standards : NFPA 20



Jockey pump

Flow rate upto 75 m³/hr Maximum head 220 m

Fire pump with Diesel Engine, Fuel Tank, Engine Controller and Accessories

> Flow rate upto 600 m³/hr Maximum head 140 m

specifications and performance are subject to change without prior notice.



Plot No. 14, G.I.D.C. Indl. Estate, Naroda, Ahmedabad - 382 330, India. Phone : 079-2282 3066, 2282 1018 : 079-2282 1511 Fax E-mail : marketing@mbhpumps.com Website : www.mbhpumps.com



narg 09/2010