

Openwell Horizontal Submersible Pumps Performance Curves Data Booklet



MBH[®]
PUMPS



ABOUT COMPANY

Since 1969, MBH Pumps owned by Kamania family, manufactures and develops centrifugal pumps for submersible and surface installations. Over the years the Company has diversified its activity from the production of pumps for agricultural applications to Domestic, Industrial, Municipal waste water, Slurry, Water Intake and various other applications.

MBH Pumps is the right partner of every Company around the world because it is able to respond quickly and efficiently to the rapid market trends. The wide range of centrifugal pumps, the well-established experience and the continuous production quality improvement, has earned MBH pumps a well reputed name in the Competitive Market.

All pumps are manufactured according to international standards and technical specifications of the customer to successfully satisfy many application areas. Technologically innovative products that provide maximum performance with minimum energy consumption, able to provide the highest safety level, maintenance-free and ease of use conditions.




Municipal and Industrial solutions

Product Data	Page No.
Openwell Horizontal Submersible Pumps (Single Phase / Three Phase)	
Cross Section	4 - 5
MS GA Drawing Dimension	6
Single Phase Monoset Submersible Pumpset	
Performance Chart & Performance Curves (Single Phase)	7
Model : 0.5 HP • 1.0 HP • 2 HP • 3 HP	
Three Phase Monoset Submersible Pumpset	
Performance Chart • Model : 1.0 HP to 40 HP	8
Performance Curves • Model : 1.0 HP • 1.5 HP • 2 HP • 3 HP • 5 HP • 6.5 HP	9
Performance Curves • Model : 7.5 HP • 10 HP • 12.5 HP • 15 HP	10
Performance Curves • Model : 20 HP • 25 HP • 30 HP • 40 HP	11




Cross Section - 0.5 HP • 1.0 HP • 1.5 HP (Standard M.O.C.)

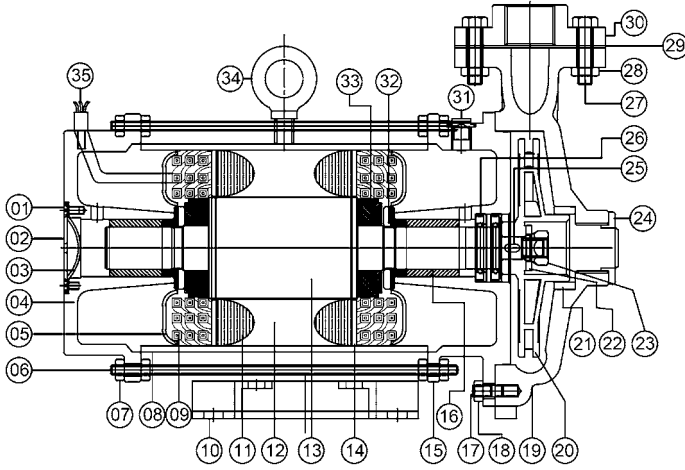

SR.	DESCRIPTION	MATERIAL
1	M5 SCREW FOR BASE COVER	S.S.
2	BASE PLATE COVER	M.S.
3	RUBBER CUP	NITRILE RUBBER
4	LOWER HOUSING	C.I. IS-210 FG 200
5	WINDING SAFETY CAP	NYLON PLASTIC
6	STUD	S.S.
7	STUD HEX NUT	S.S.
8	STATOR PIPE	S.S.
9	WINDING COILS	PVC
10	BASE STAND	M.S.

SR.	DESCRIPTION	MATERIAL
11	STATOR STAMPING	CRNO
12	STATOR COMPLETE	
13	ROTOR COMPLETE	
14	END LAMINATION UP + LO SIDE	M.S.
15	UPPER HOUSING	C.I. IS-210 FG200
16	UPPER + LOWER BEARING BUSH	L.T.B. - 4
17	STUD VOLUTE & UPPER FIT	S.S.
18	STUD HEX NUT VOLUTE & UPPER FIT	S.S.
19	VOLUTE	C.I. IS-210 FG 200
20	IMPELLER	C.I. IS-210 FG200
21	NECK RING	L.T.B. - 4
22	LOCKING WASHER	S.S.
23	ROTOR NYLON NUT	M.S.
24	SUCTION COVER	PVC
25	IMPELLER KEY	S.S.
26	OIL SEAL	RUBBER STANDARD
27	HEX. BOLT FOR VOLUTE DELI. FLANGE	M.S.
28	HEX. NUT FOR VOLUTE DELI. FLANGE	M.S.
29	FLANGE PACKING RUBBER	NITRILE RUBBER
30	DELI VARY FLANGE	C.I. IS-210 FG200
31	DRAIN PLUG	BRASS
32	UPPER + LOWER C T BEARING	L.T.B. - 4
33	UP + LO SIDE REVOLVING PLATE	C.I. - CARBON
34	EYE BOLT	M.S.
35	CABLE	STANDARD


Cross Section - 2.0 HP • 3.0 HP • 5.0 HP • 6.5 HP (Standard M.O.C.)

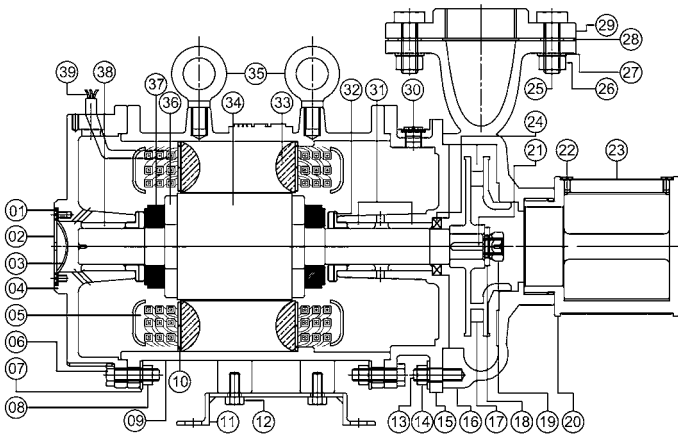

SR.	DESCRIPTION	MATERIAL
1	M5 SCREW FOR BASE COVER	S.S.
2	BASE PLATE COVER	M.S.
3	RUBBER CUP	NITRILE RUBBER
4	LOWER HOUSING	C.I. IS-210 FG 200
5	WINDING SAFETY CAP	NYLON PLASTIC
6	HEX BOLT BASE + BODY FIT	M.S.
7	WASHER	S.S.
8	HEX NUT	M.S.
9	MOTOR BODY	C.I. IS-210 FG 200
10	END LAMINATION UP + LO SIDE	M.S.
11	BASE STAND	M.S.

SR.	DESCRIPTION	MATERIAL
12	HEX BOLT BASE STAND FIT	M.S.
13	STUD	S.S.
14	STUD HEX NUT	S.S.
15	UPPER HOUSING	C.I. IS-210 FG 200
16	VOLUTE	C.I. IS-210 FG 200
17	IMPELLER	C.I. IS-210 FG 200
18	LOCKING WASHER	S.S.
19	ROTOR NYLON NUT	M.S.
20	FOOT VALVE	C.I. IS-210 FG 200
21	IMPELLER KEY	S.S.
22	M5 SCREW FOR STRAINER	S.S.
23	STRAINER	S.S.
24	OIL SEAL	RUBBER STANDARD
25	HEX. BOLT FOR VOLUTE DELI. FLANGE	M.S.
26	HEX. NUT FOR VOLUTE DELI. FLANGE	M.S.
27	WASHER	S.S.
28	FLANGE PACKING RUBBER	NITRILE RUBBER
29	DELIVERY FLANGE	C.I. IS-210 FG 200
30	DRAIN PLUG	BRASS
31	UPPER BEARING BUSH	L.T.B. - 4
32	C.T. BEARING (LEFT-RIGHT)	L.T.B. - 4
33	STATOR STAMPING	CRNO
34	ROTOR STAMPING	CRNO
35	LYL BOLT	M.S.
36	BALANCE RING (LEFT - RIGHT)	C.I. IS-210 FG 200
37	UP + LO SIDE REVOLVING PLATE	C.I. - CARBON
38	LOWER BEARING BUSH	L.T.B. - 4
39	CABLE	STANDARD

Cross Section - 7.5 HP • 10 HP • 12.5 HP • 15 HP • 20 HP • 25 HP • 30 HP • 40 HP (Standard M.O.C.)

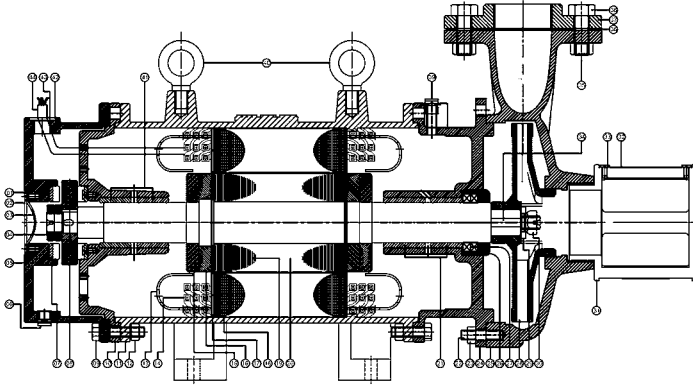


SR.	DESCRIPTION	MATERIAL
1	M5 SCREW FOR BASE COVER	S.S.
2	BASE PLATE COVER	M.S.
3	RUBBER CUP	NITRILE RUBBER
4	CHECK NUT	S.S.
5	MOTOR BASE	C.I. IS-210 FG 200
6	DRAIN PLUG	BRASS
7	C.T. BEARING	S.S.
8	REVOLVING PLAT	C.I. + CARBON
9	HEX BOLT BASE + HO+BODY FIT	S.S.
10	LOWER HOUSING	C.I. IS-210 FG 200
11	MOTOR BODY	C.I. IS-210 FG 200
12	HEX NUT	S.S.
13	WINDING SAFETY CAP	NYLON PLASTIC
14	WINDING COILS	PVC

SR.	DESCRIPTION	MATERIAL
15	BALANCING RING UP + LO SIDE	C.I. IS-210 FG 200
16	COPPER RING (UP + LO SIDE)	COPPER
17	END LAMINATION (UP + LO SIDE)	M.S.
18	STATOR STAMPING	CRNO.
19	ROTOR STAMPING	CRNO.
20	ROTOR COMPLETE	
21	BUSH UPPER HOUSING	L.T.B.- 4
22	STUD UPPER HO + VOLUTE FIT	S.S.
23	STUD HEX NUT	S.S.
24	UPPER HOUSING	C.I. IS-210 FG 200
25	VOLUTE	C.I. IS-210 FG 200
26	SAND GUARD	PLASTIC
27	OIL SEAL	RUBBER STANDARD
28	IMPELLER	C.I. IS-210 FG 200
29	LOCKING WASHER	S.S.
30	HEX NUT IMPELLER LOCK FIT	S.S.
31	FOOT VALVE	C.I. IS-210 FG 200
32	FOOT VALVE STRAINER	S.S.
33	M5 SCREW FOR STRAINER	S.S.
34	IMPELLER KEY	S.S.
35	HEX. BOLT FOR VOLUTE DELI. FLANGE	M.S.
36	FLANGE PACKING RUBBER	NITRILE RUBBER
37	DELI VARY FLANGE	C.I. IS-210 FG 200
38	HEX. NUT FOR VOLUTE DELI. FLANGE	M.S.
39	DRAIN PLUG	BRASS
40	EYE BOLT	M.S.
41	BUSH LOWER HOUSING	L.T.B.- 4
42	CABLE CLIP + M5 SCREW FIT	S.S.
43	GROMMET	NITRILE RUBBER
44	CABLE	STANDARD


MS GA Drawing Dimension

Sr. No.	Model	HP	Del. in mm	A	B	C	D	E	H	Net Wt. in kg	Gross Wt. in kg
1	1SHMSSA0.5L	0.5	25	150	260	55	108	162	235	15	18
2	1SHMSSA0.5H	0.5	25	150	275	55	108	182	240	16	19
3	1SHMSSA1	1	25	178	360	122	130	182	267	30	33
4	215SHMSSA1	1	50x40	178	367	122	130	194	264	31	34
5	2SHMSSA1	1	50	178	367	122	130	194	264	31	34
6	15SHMS2	2	40	178	427	122	130	194	264	40	44
7	2SHMS2	2	50	178	427	122	130	194	264	40	44
8	2SHMS3	3	50	222	392	122	130	214	311	45	52
9	2SHMS3HH	3	50	222	399	122	130	210	325	50	57
10	3SHMS3	3	75	222	399	122	130	210	325	50	57
11	hm1H1	1	1x1	178	360	122	130	182	267	30	32
12	hm1H15	1	1.5x1.5	178	367	122	130	194	264	31	33
13	hm1H2	1	2x2	178	367	122	130	194	264	31	33
14	hm15H15	1.5	1.5x1.5	178	392	122	130	194	264	35	37
15	hm15H2	1.5	2x2	178	392	122	130	194	264	35	37
16	hm2H15	2	1.5x1.5	178	427	122	130	194	264	40	43
17	hm2H2	2	2x2	178	427	122	130	194	264	40	43
18	hm3H2	3	2.5x2	222	392	122	130	214	311	45	50
19	hm3HH252	3	2.5x2	222	399	122	130	210	325	50	55
20	hm3L25	3	2.5x2.5	222	392	122	130	214	311	45	50
21	hm3L3	3	3x3	222	426	122	130	257	324	51	56
22	hm5H2	5	2x2	227	438	224	163	238	349	59	64
23	hm5HH252	5	2.5x2	227	442	224	163	258	362	59	64
24	hm5L25	5	2.5x2.5	227	438	224	163	238	349	60	65
25	hm5L3	5	3x3	227	453	224	163	267	387	60	65
26	hm5L4	5	4x4	227	449	224	163	270	364	62	67
27	hm65H2	6.5	2x2	227	452	224	163	258	362	62	67
28	hm65H252	6.5	2.5x2	227	452	224	163	258	362	62	67
29	hm65HH252	6.5	2.5x2	227	451	224	163	272	370	62	67
30	hm65L25	6.5	2.5x2.5	227	463	224	163	267	387	62	67
31	hm65L3	6.5	3x3	227	463	224	163	267	387	62	67
32	hm65L4	6.5	4x4	227	463	224	163	292	402	64	69
33	hm75H2	7.5	2x2	227	544	169	127	258	359	74	99
34	hm75H252	7.5	2.5x2	227	544	169	127	258	359	72	97
35	hm75HH252	7.5	2.5x2	227	543	169	127	272	367	74	99
36	hm75L3	7.5	3x3	227	555	169	127	267	384	75	100
37	hm75L325	7.5	3x2.5	227	555	169	127	267	384	75	100
38	hm75L4	7.5	4x4	227	555	169	127	292	399	82	107
39	hm10H2	10	2x2	227	568	192	127	272	368	79	104
40	hm10HH2	10	2x2	227	568	192	127	272	368	79	104
41	hm10L3	10	3x3	227	580	192	127	267	385	80	105
42	hm10L4	10	4x4	227	580	192	127	292	400	86	111
43	hm125H2	12.5	2x2	250	627	328	183	319	420	108	133
44	hm125L3	12.5	3x3	250	635	192	127	298	382	104	129
45	hm125L4	12.5	4x4	250	635	328	183	296	434	109	134
46	hm15H2	15	2x2	250	647	328	183	319	420	109	134
47	hm15L3	15	3x3	250	655	192	127	298	382	108	133
48	hm15L4	15	4x4	250	655	328	183	296	434	113	138
49	hm20H2	20	2x2	250	717	328	183	319	420	125	155
50	hm20L3	20	3x3	250	727	328	183	327	438	124	154
51	hm20L4	20	4x4	250	742	328	183	344	490	136	166
52	hm20L5	20	5x5	250	740	328	183	310	466	135	165
53	hm25L3	25	3x3	268	828	282	187	327	416	152	182
54	hm25L4	25	4x4	268	839	282	187	344	468	160	190
55	hm25L5	25	5x5	268	834	282	187	342	466	167	197
56	hm30L3	30	3x3	268	878	282	187	327	416	165	205
57	hm30L4	30	4x4	268	889	282	187	344	468	173	213
58	hm30L5	30	5x5	268	884	282	187	342	466	180	220
59	hm30L6	30	6x6	268	923	282	187	356	494	204	244
60	hm40L4	40	4x4	310	972	295	197	354	467	223	263
61	hm40L5	40	5x5	310	959	295	197	342	480	230	270
62	hm40L6	40	6x6	310	998	295	197	356	508	254	294

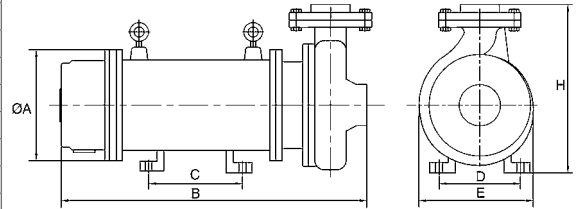

All Dimension are in mm

ØA	B	C	D	E	H
±2	±10	±2	±2	±5	±10

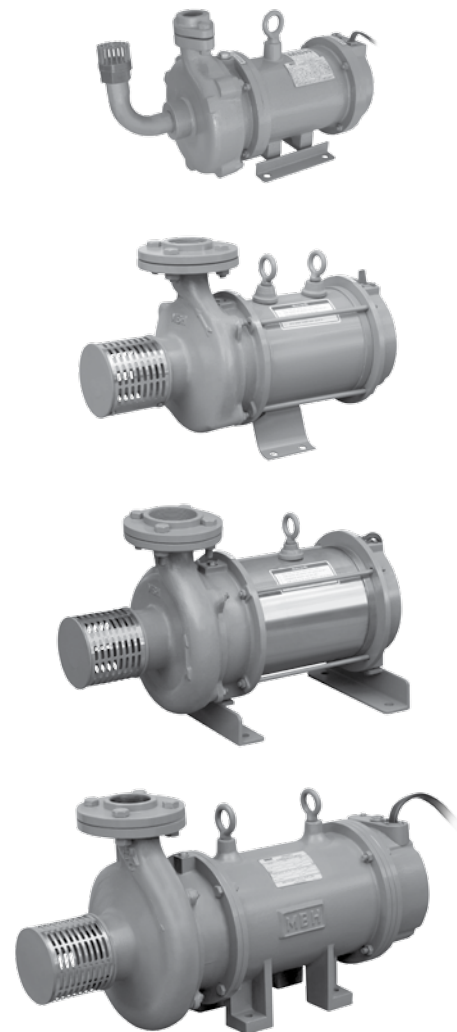

Performance Chart • Model : 0.5 HP & 1.0 HP

SS BODY ALUMINIUM ROTOR				HEAD IN METERS														
Sr. No.	Model	HP	Suc. x Del.	DISCH. IN LPM	6	8	10	12	15	18	21	24	28	30	32	35	36	
1	1 SHMSSA 0.5 L	0.5	25 x 25		100	90	80	70	45	-	-	-	-	-	-	-	-	-
2	1 SHMSSA 0.5 H	0.5	25 x 25		-	160	150	130	110	80								
3	1 SHMSSA 1.0	1.0	25 x 25		-	-	-	245	225	200	170	130	50	-	-	-	-	-
4	215 SHMSSA 1.0	1.0	50 x 38		-	-	400	375	380	310	215	-	-	-	-	-	-	-
5	2 SHMSSA 1.0	1.0	50 x 50	510	430	420	415	390	-	-	-	-	-	-	-	-	-	


Performance Chart • Model : 2.0 HP

CI BODY COPPER ROTOR				HEAD IN METERS													
Sr. No.	Model	HP	Suc. x Del.	DISCH. IN LPM	7.5	10	12.5	15	17.5	20	22.5	25	27.5	30	32	35	36
6	15 SHMS 2.0	2.0	40		-	365	340	315	290	250	200	160	90	40	40	-	-
7	2 SHMS 2.0	2.0	50	-	480	450	400	370	300	240	180	100	70	70	-	-	-


Performance Chart • Model : 3.0 HP

CI BODY ALUMINIUM ROTOR				HEAD IN METERS														
Sr. No.	Model	HP	Suc. x Del.	DISCH. IN LPM	7.5	10	12.5	15	17.5	20	22.5	25	27.5	30	32	35	36	
8	2SHMS3.0	3.0	50		-	-	-	-	480	438	378	318	275	225	150	-	-	-
9	2SHMS3 HH	3.0	50		-	-	-	-	-	-	-	350	325	300	200	160	80	-
10	3SHMS3.0	3.0	75	1050	900	800	700	-	-	-	-	-	-	-	-	-	-	

Performance Curves • Model : 0.5 HP & 1.0 HP

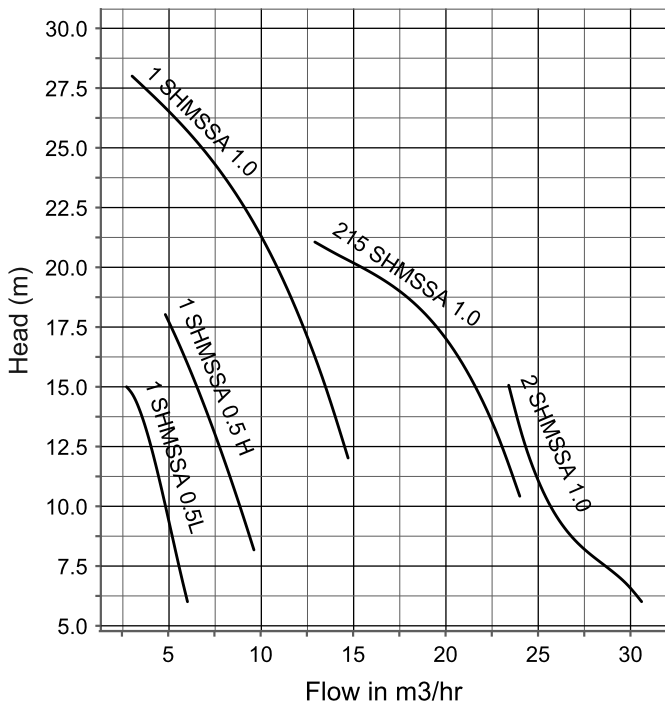

Performance Curves • Model : 2 HP & 3 HP

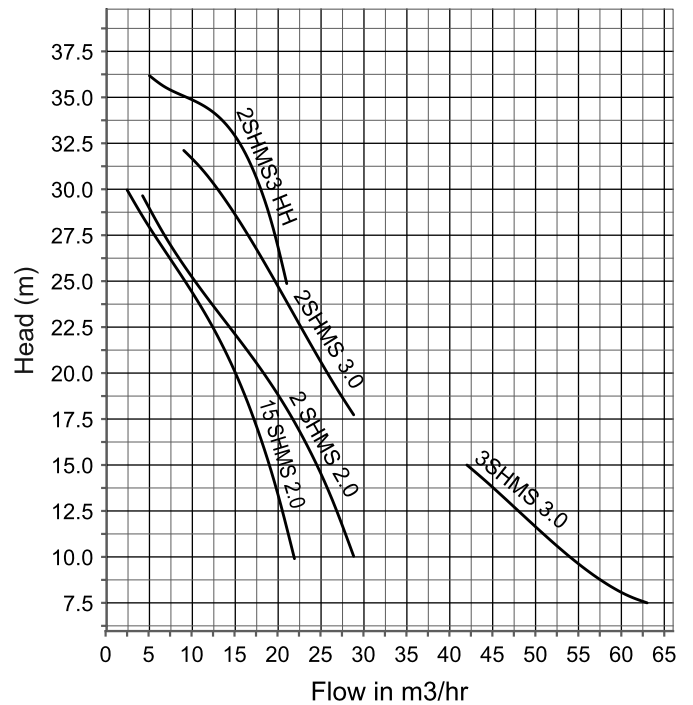


Performance Chart • Model : 1.0 HP to 40 HP


CI BODY COPPER ROTOR				HEAD IN METERS																			
Sr. No.	Model	HP	Del. in mm	7.5	10.0	12.5	15	17.5	20	22.5	25	27.5	30	32.5	35	37.5	40	42.5	45	47.5	50	52.5	55
1	hm1H1	1.0	25	-	-	-	170	150	130	100	60	30	-	-	-	-	-	-	-	-	-	-	-
2	hm1H15	1.0	38	395	365	320	260	160	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3	hm1H2	1.0	50	395	365	320	260	160	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4	hm15H15	1.5	38	-	-	-	295	260	230	180	80	-	-	-	-	-	-	-	-	-	-	-	-
5	hm15H2	1.5	50	-	-	340	320	260	210	120	-	-	-	-	-	-	-	-	-	-	-	-	-
6	hm2H15	2.0	38	-	-	-	-	400	330	270	200	120	80	-	-	-	-	-	-	-	-	-	-
7	hm2H2	2.0	50	-	-	-	430	400	330	270	200	-	-	-	-	-	-	-	-	-	-	-	-
8	hm-3H2	3.0	65 x 50	-	-	-	-	500	480	450	400	280	-	-	-	-	-	-	-	-	-	-	-
9	hm3HH252	3.0	65 x 50	-	-	-	-	-	-	350	325	300	290	260	200	140	-	-	-	-	-	-	-
10	hm3L25	3.0	65	-	-	600	550	510	480	450	350	270	230	-	-	-	-	-	-	-	-	-	-
11	hm3L3	3.0	75	1050	900	800	700	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
12	hm5H2	5.0	65 x 50	-	-	-	-	-	-	-	630	580	530	470	370	290	100	-	-	-	-	-	-
13	hm5HH252	5.0	65 x 50	-	-	-	-	-	-	-	-	600	550	460	390	330	250	130	-	-	-	-	-
14	hm5L25	5.0	65	-	-	-	-	760	720	675	640	540	470	290	-	-	-	-	-	-	-	-	-
15	hm5L3	5.0	75	1175	1020	930	850	760	650	350	-	-	-	-	-	-	-	-	-	-	-	-	-
16	hm5L4	5.0	100	1460	1350	1100	950	500	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
17	hm65H2	6.5	50	-	-	-	-	-	640	610	600	590	540	270	-	-	-	-	-	-	-	-	-
18	hm65H252	6.5	65 x 50	-	-	-	-	-	-	650	600	560	540	460	400	290	200	-	-	-	-	-	-
19	hm65HH252	6.5	50	-	-	-	-	-	-	-	750	670	640	550	490	390	270	130	-	-	-	-	-
20	hm65L25	6.5	65	-	-	-	1250	1190	1050	900	750	200	-	-	-	-	-	-	-	-	-	-	-
21	hm65L3	6.5	75	-	-	-	1250	1190	1050	900	750	200	-	-	-	-	-	-	-	-	-	-	-
22	hm65L4	6.5	100	1650	1600	1350	1060	570	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
23	hm75H2	7.5	50	-	-	-	-	-	-	-	650	590	500	460	430	350	250	-	-	-	-	-	-
24	hm75H252	7.5	65 x 50	-	-	-	-	-	-	-	755	715	650	590	530	470	330	250	-	-	-	-	-
25	hm75HH252	7.5	50	-	-	-	-	-	-	-	-	830	780	740	680	600	500	380	210	-	-	-	-
26	hm75L3	7.5	75	-	-	-	1330	1250	1150	1040	890	530	180	-	-	-	-	-	-	-	-	-	-
27	hm75L325	7.5	75 x 65	-	-	-	1330	1250	1150	1040	890	530	180	-	-	-	-	-	-	-	-	-	-
28	hm75L4	7.5	100	-	-	1375	1310	1230	1025	800	300	-	-	-	-	-	-	-	-	-	-	-	-
29	hm10H2	10.0	50	-	-	-	-	-	-	-	-	-	-	780	730	680	650	550	520	380	300	-	-
30	hm10HH2	10.0	50	-	-	-	-	-	-	-	-	-	-	-	730	710	700	680	665	650	510	300	-
31	hm10L3	10.0	75	-	-	-	-	1450	1300	1250	1200	1040	960	800	640	-	-	-	-	-	-	-	-
32	hm10L4	10.0	100	-	-	-	1650	1500	1190	900	550	-	-	-	-	-	-	-	-	-	-	-	-

CI BODY COPPER ROTOR				HEAD IN METERS																						
Sr. No.	Model	HP	Del. in mm	15	17.5	20	22.5	25	27.5	30	32.5	35	37.5	40	42.5	45	50	52.5	55	57.5	60	62.5	65	67.5	70	75
33	hm125H2	12.5	50	-	-	-	-	-	-	-	-	-	-	-	780	760	740	690	600	450	-	-	-	-	-	-
34	hm125L3	12.5	75	-	-	-	-	1265	1230	1200	1150	905	650	400	-	-	-	-	-	-	-	-	-	-	-	-
35	hm125L4	12.5	100	1720	1685	1640	1550	1500	1400	1300	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
36	hm15H2	15.0	50	-	-	-	-	-	-	-	-	-	-	-	-	-	700	640	590	530	470	350	120	-	-	-
37	hm15L3	15.0	75	-	-	-	-	1750	1650	1550	1450	1400	1220	990	840	550	-	-	-	-	-	-	-	-	-	-
38	hm15L4	15.0	100	-	-	2150	2050	1850	1700	1350	1050	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
39	hm20H2	20.0	50	-	-	-	-	-	-	-	-	-	-	-	-	-	-	930	900	880	840	790	760	740	550	-
40	hm20L3	20.0	75	-	-	-	-	-	-	-	-	-	1330	1310	1270	1135	965	700	330	-	-	-	-	-	-	-
41	hm20L4	20.0	100	-	-	-	2500	2350	2150	1950	1600	1300	1000	-	-	-	-	-	-	-	-	-	-	-	-	-
42	hm20L5	20.0	125	-	3000	2900	2650	2360	2050	1750	1400	1050	-	-	-	-	-	-	-	-	-	-	-	-	-	-
43	hm25L3	25.0	75	-	-	-	-	-	-	-	-	-	-	-	1550	1430	1320	1250	1150	975	850	-	-	-	-	-
44	hm25L4	25.0	100	-	-	-	3050	2800	2650	2550	2000	1850	1530	-	-	-	-	-	-	-	-	-	-	-	-	-
45	hm25L5	25.0	125	-	-	3600	3250	2950	2650	2350	1800	800	-	-	-	-	-	-	-	-	-	-	-	-	-	-
46	hm30L3	30.0	75	-	-	-	-	-	-	-	-	-	-	-	-	-	1800	1700	1500	1350	1100	850	600	-	-	-
47	hm30L4	30.0	100	-	-	-	-	-	3200	3100	3000	2800	2400	2150	1850	1240	-	-	-	-	-	-	-	-	-	-
48	hm30L5	30.0	125	-	-	-	3500	3400	3000	2800	2600	2000	830	-	-	-	-	-	-	-	-	-	-	-	-	-
49	hm30L6	30.0	150	-	-	4100	3850	3700	3400	2900	2500	2000	-	-	-	-	-	-	-	-	-	-	-	-	-	-
50	hm40L4	40.0	100	-	-	-	-	-	-	-	-	-	2950	2650	2300	2200	2100	1800	1550	-	-	-	-	-	-	-
51	hm40L5	40.0	125	-	-	-	-	-	3200	3100	3050	2800	2700	2500	2250	1800	-	-	-	-	-	-	-	-	-	-
52	hm40L6	40.0	150	-	-	-	-	3800	3550	3300	3050	2800	2550	2050	1040	-	-	-	-	-	-	-	-	-	-	-


Performance Curves • Model : 1.0, 1.5 & 2 HP

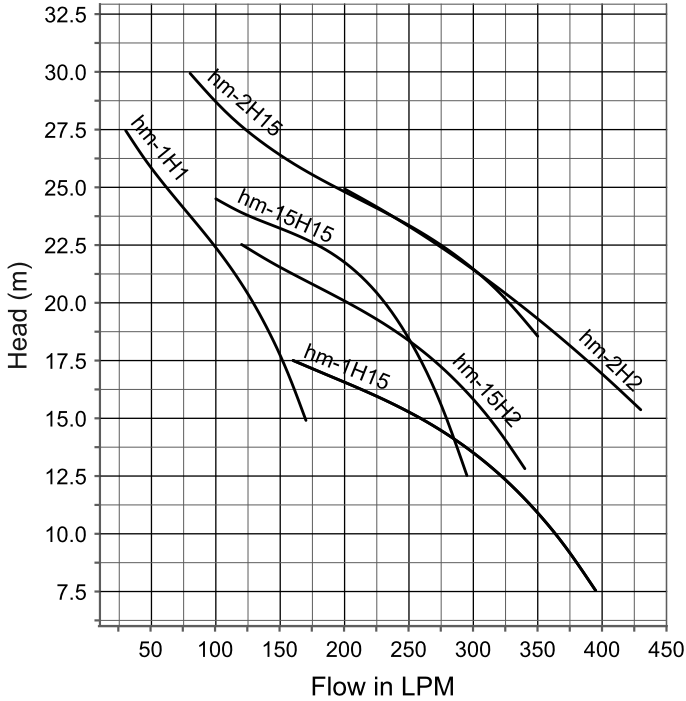


Performance Curves • Model : 3 HP

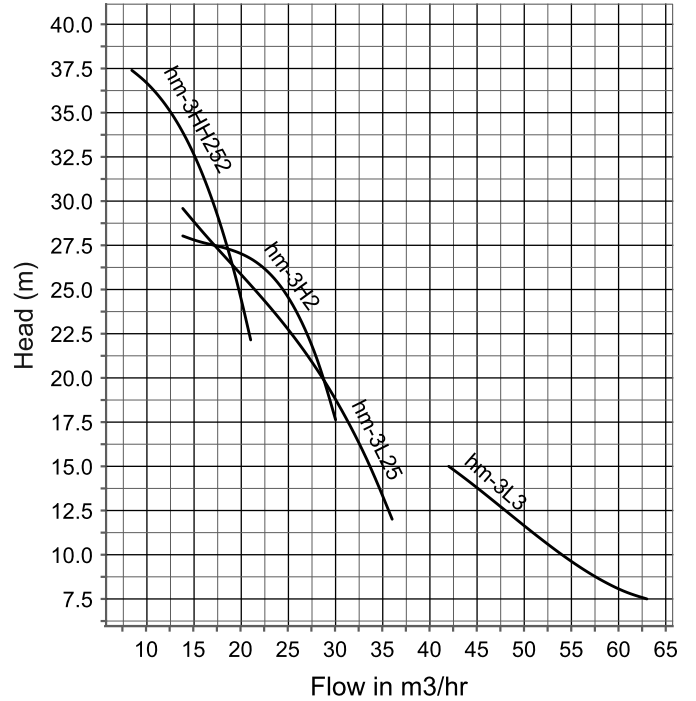


Performance Curves • Model : 5 HP

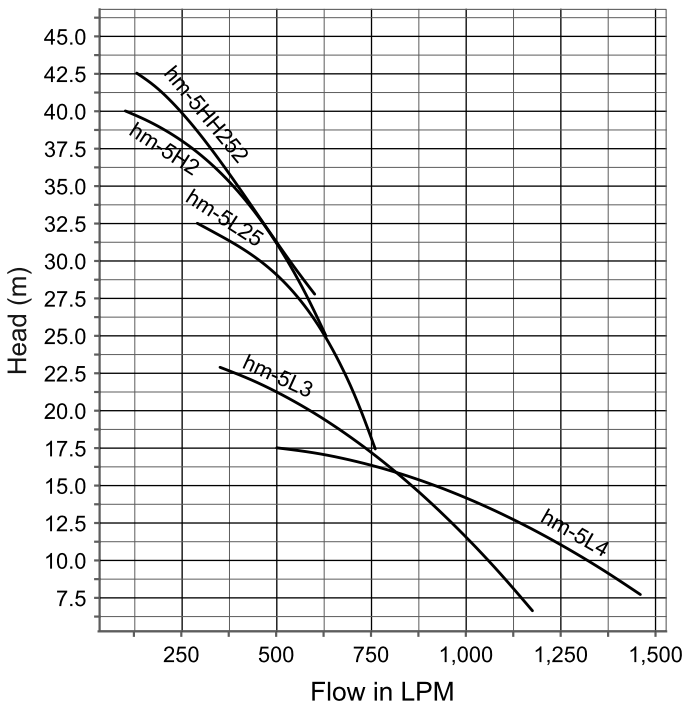


Performance Curves • Model : 6.5 HP

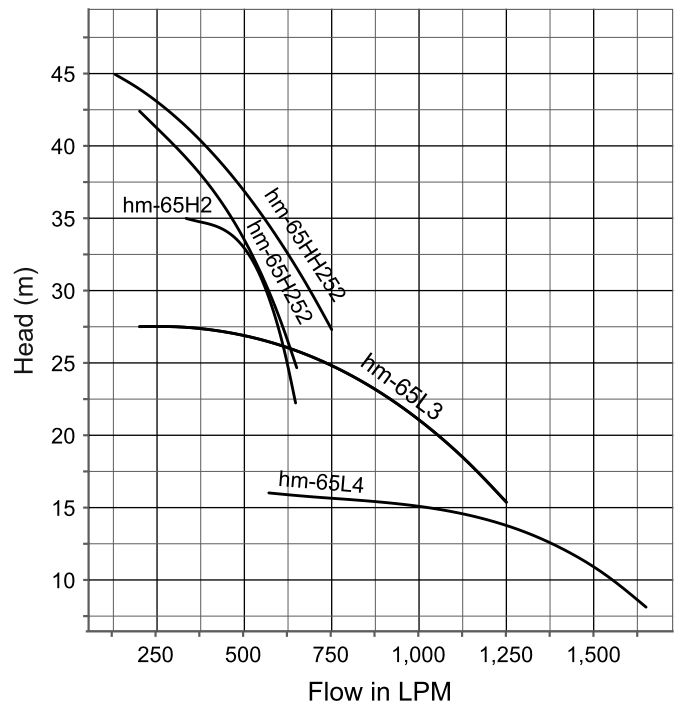


Performance Curves • Model : 7.5 HP

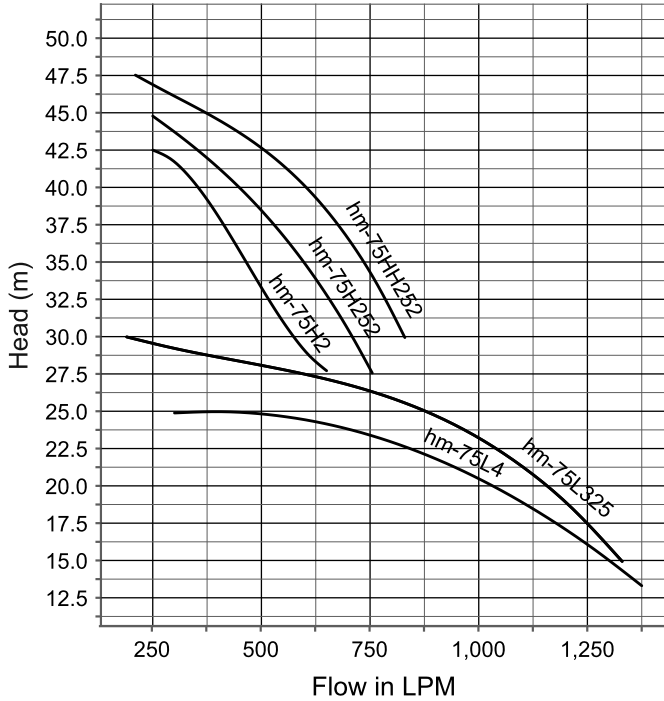


Performance Curves • Model : 10 HP

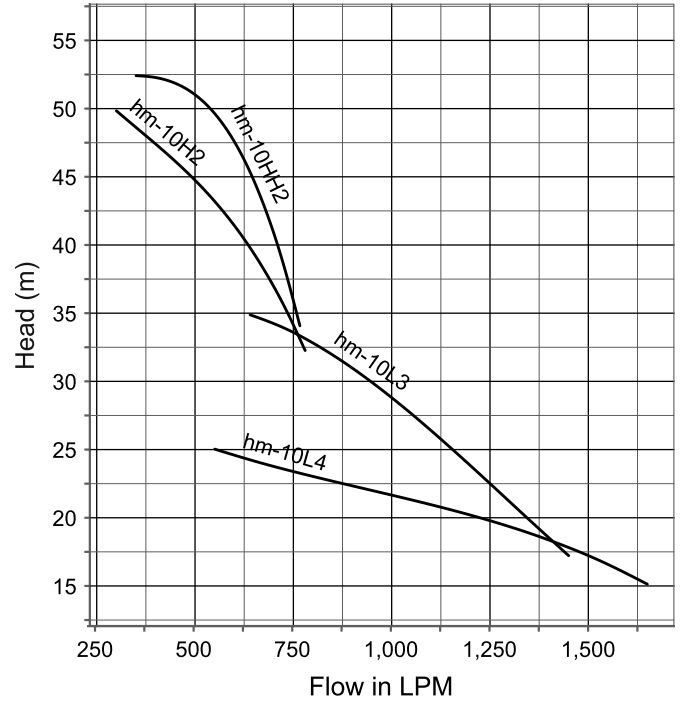


Performance Curves • Model : 12.5 HP

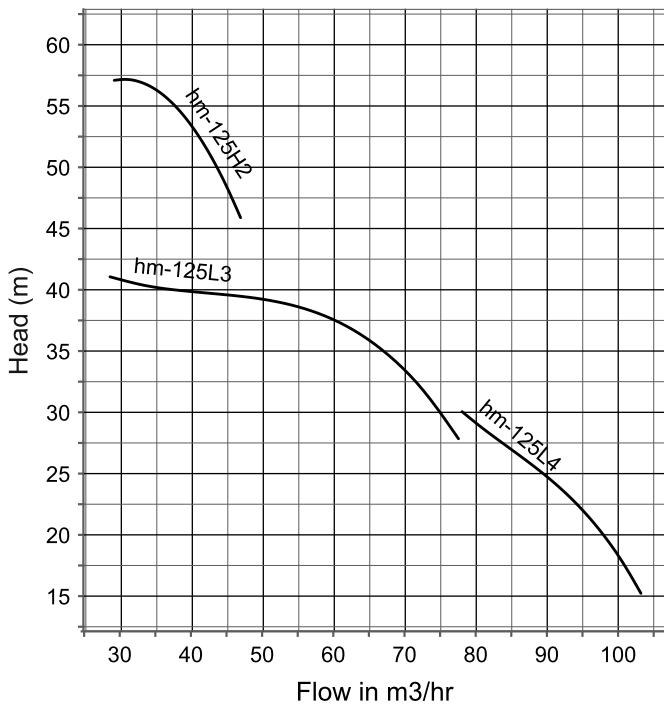


Performance Curves • Model : 15 HP

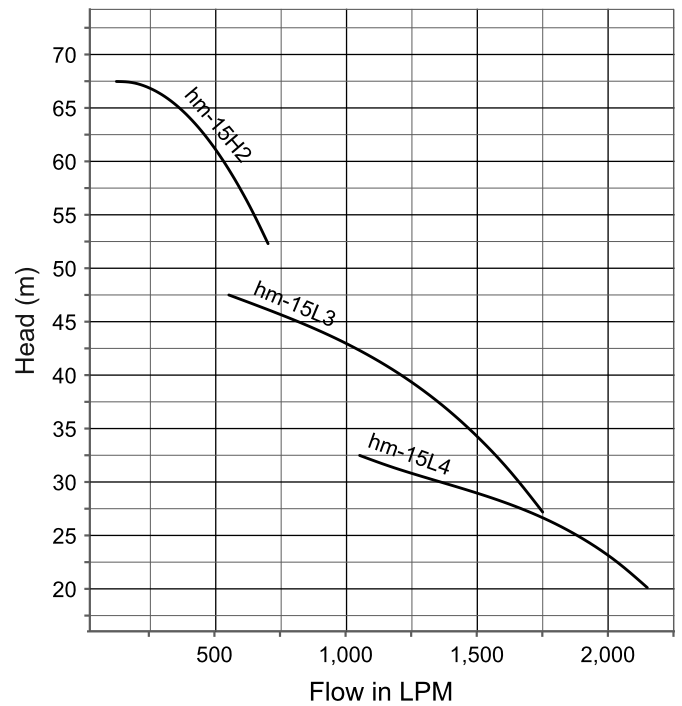


Performance Curves • Model : 20 HP

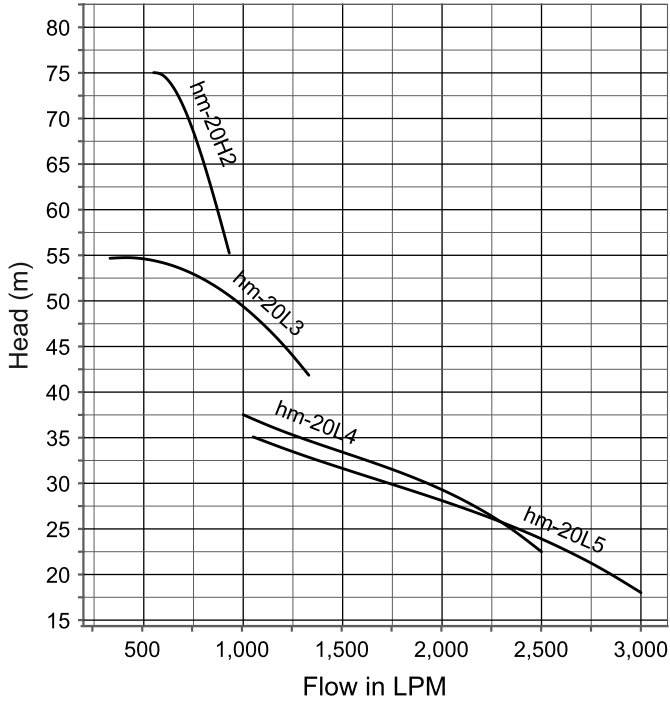


Performance Curves • Model : 25 HP

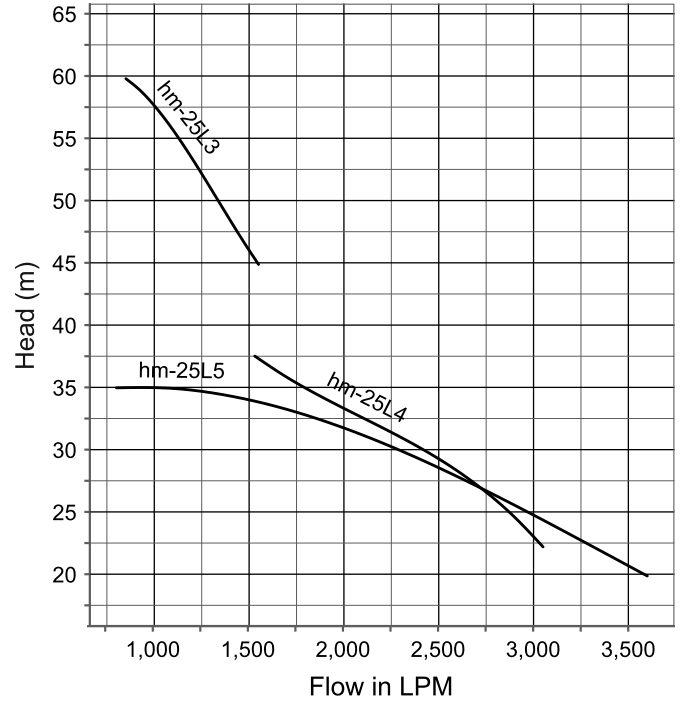

Performance Curves • Model : 30 HP

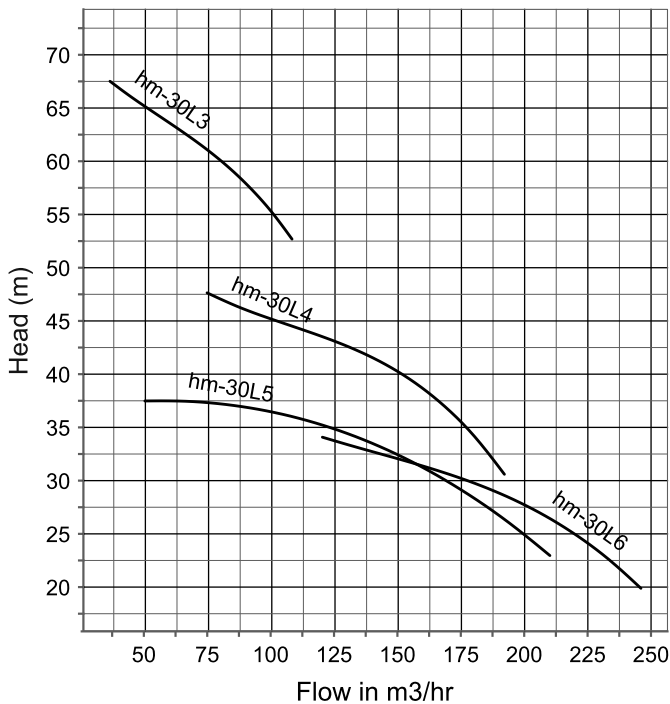

Performance Curves • Model : 40 HP

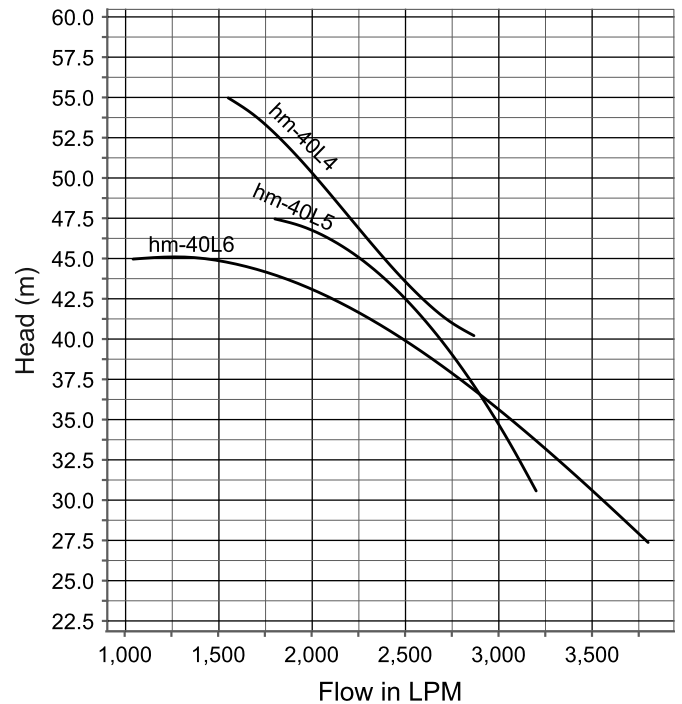

“ Fresh water is becoming increasingly scarce worldwide.
That is why we consider it as our responsibility to develop pumps
and systems that can use to obtain and use this precious resource
in the most efficient way possible – now and in the future.”

Specifications and performance are subject to change without prior notice.

MBH[®]
PUMPS

mbh pumps (gujarat) pvt. ltd.

14, G.I.D.C. Naroda Indl. Estate,
Ahmedabad - 382 330, India.
+91-79-2282 3066 / 2282 1018
marketing@mbhpumps.com
exports@mbhpumps.com
www.mbhumps.com

